DWG.NO. T310F(R)SH2G

| 부호 SYM. | 내용 DESCRIPTION | 위치 POSITION | 개정번호 REVISION NO. | 일자 DATE | 수정 REV'D | 승인 APP'D |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |

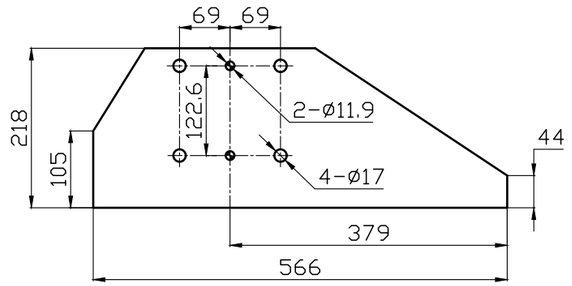


BRACKET DIMENSION

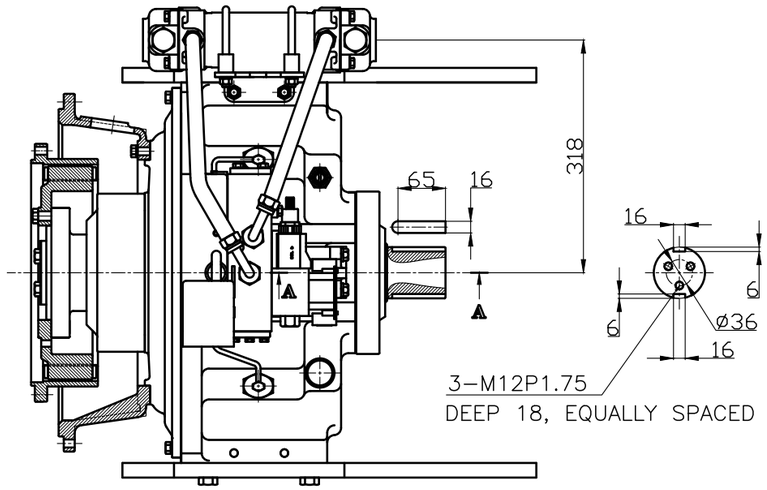


| DPO 310 HYDRAULIC POWER TAKE OFF SPECIFICATION | | |
|---|---|---|
| GEAR RATIO | ONLY 1 : 1 | |
| TOTAL WEIGHT | APPROX. 250 kg(DRY) | |
| OIL CAPACITY | APPROX. 5 L | |
| OIL VISCOSITY | SAE # 30 | |
| OIL PRESSURE | 1.56 ~ 2.45 MPa | CLUTCH OIL |
| DIRECTION OF ROTATION | INPUT | THE SAME DIRECTION AS ENGINE ROTATION |
| | OUTPUT | THE SAME DIRECTION AS ENGINE ROTATION |
| OIL CHANGE INTERVAL | THE FIRST 100HOURS OF INITIAL OPERATION | |
| | AND EVERY 1000HOURS THEREAFTER | |
| SHIFTING LIMIT | UNDER 50% OF THE RATED ENGINE SPEED | |
| OIL COOLER | WATER FLOW 40 ~ 60L/min | |
| | TEMPERATURE OF COOLING WATER | MAX 32°C |

| ROTATION DIRECTION BY MODEL (VIEWED FROM B) | | |
|---|---|---|
| MODEL | INPUT (ENGINE) | OUTPUT (PTO) |
| DPO-F310S | (RIGHT) | (RIGHT) |
| DPO-R310S | (LEFT) | (LEFT) |

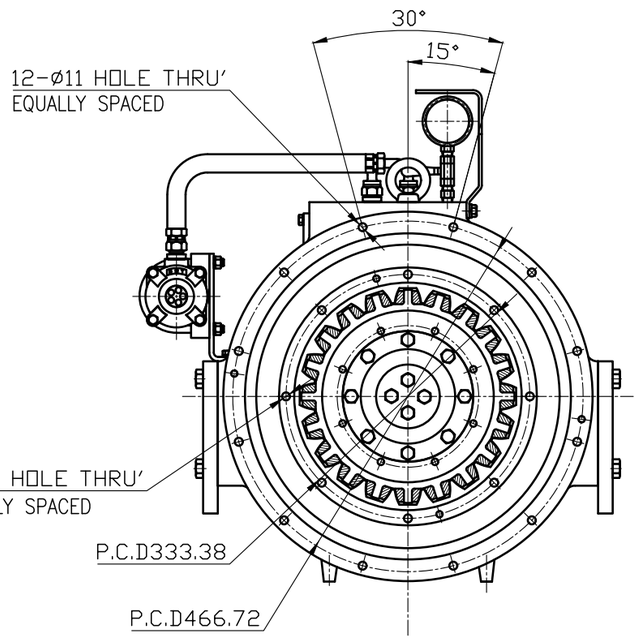


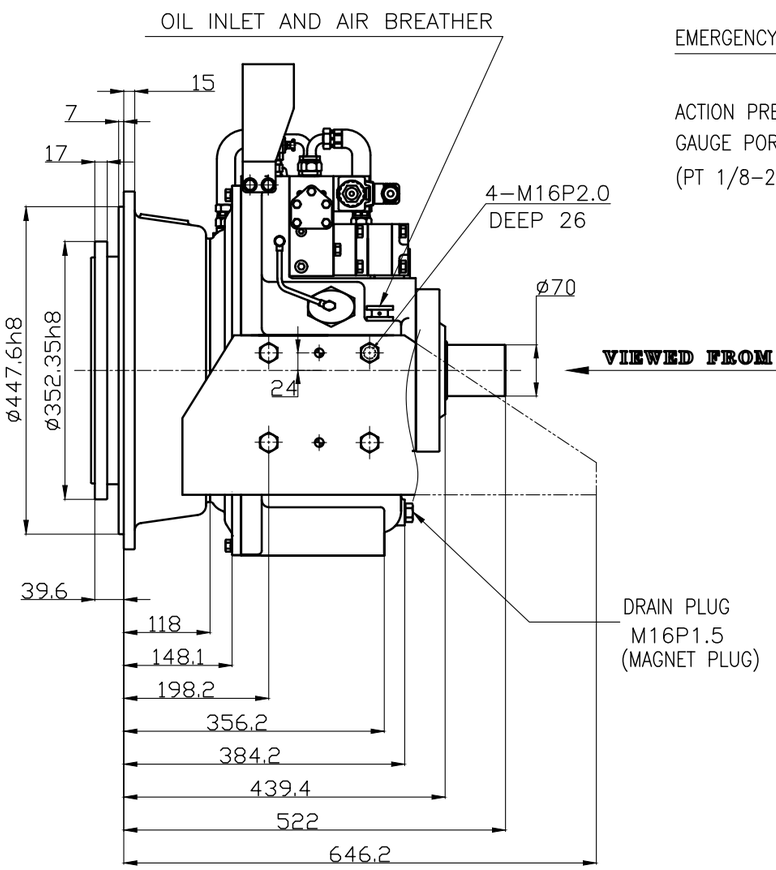


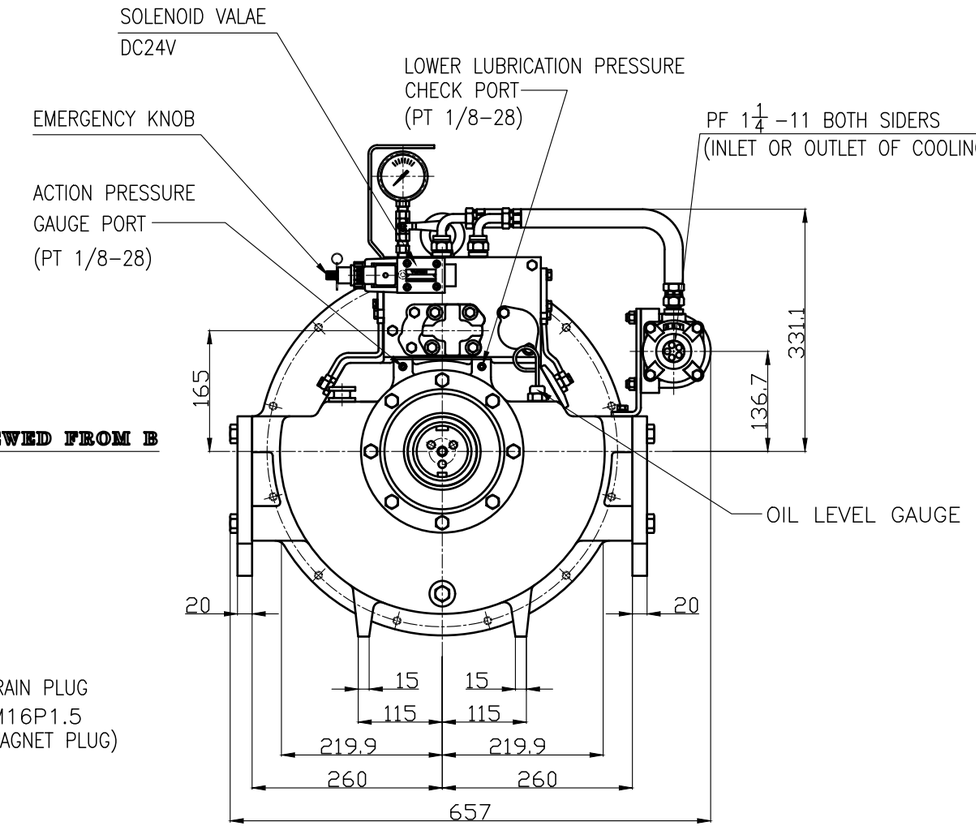


REMARK

1. HOUSING: SAE#2
2. DRIVING RING: SAE 11.5"
3. OUTPUT SHAFT SPEC: SHAFT ø70_ KEY 16mm*73mm

| 공통공차 TOLERANCE ON | | | |
|---|---|---|---|
| | 분수 FRACTIONS | 소수 DECIMALS | 각도 ANGLES |
| | ± — | ± — | ± — |
| 절삭가공 | | | |
| 구분 | 조급 | 중급 | 정급 |
| 1 초과 4 이하 | ± 0.3 | ± 0.1 | ± 0.05 |
| 4 16 | ± 0.5 | ± 0.2 | ± 0.07 |
| 16 63 | ± 0.7 | ± 0.3 | ± 0.1 |
| 63 250 | ± 1.2 | ± 0.5 | ± 0.2 |
| 250 1000 | + 2.0 | + 0.8 | + 0.3 |

| 번호 NO. | 품번 PART NO. | 품명 PART NAME | 재수 Q'TY | 재질 MATERIAL | 규격 SIZE | 비고 REMARKS |
|---|---|---|---|---|---|---|
| | | | | | | |

| | | | |
|---|---|---|---|
| 재질 MATERIAL | | | 형식 TYPE: DPO-F(R)310S |
| 작성 DATE: 2013.02.05 | 척도 SCALE: 1/1 | | 원도번 ORIGINAL DWG. NO. |
| 승인 APPROVED BY | 검도 CHECKED BY | 제도 DRAWN: 경철 | 설계 DESIGNED |
| | | | 품명 NAME: PTO INSTALLATION DRAWING |
| | | | 도번 DWG. NO.: T 3 1 0 F(R)SH2G |
| D-I INDUSTRIAL | | | 크기 SIZE: A0 / 코드번호 CODE ID. NO. |