DWG. NO. 도 번	T087F(R)BGEH3115

REV.No 개정번호	SYM. 부 호	DESCRIPTION 내 용	POSITION 위 치	ADOPTION SHEET NO. 채용서번호	DATE 일 자	REV'D 수 정	APP'D 승 인

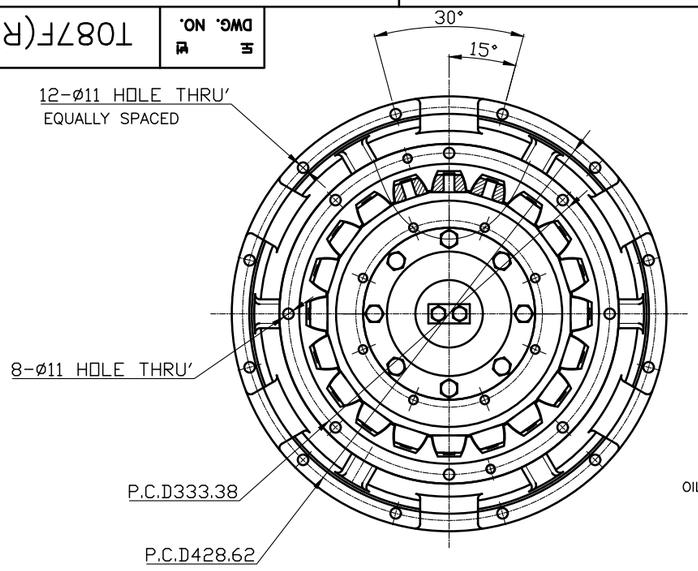

HOUSING: SAE#3, DRIVING RING: SAE 11.5"

View -A

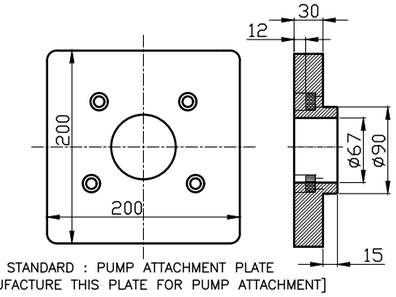

STANDARD : PUMP ATTACHMENT PLATE
[MANUFACTURE THIS PLATE FOR PUMP ATTACHMENT]

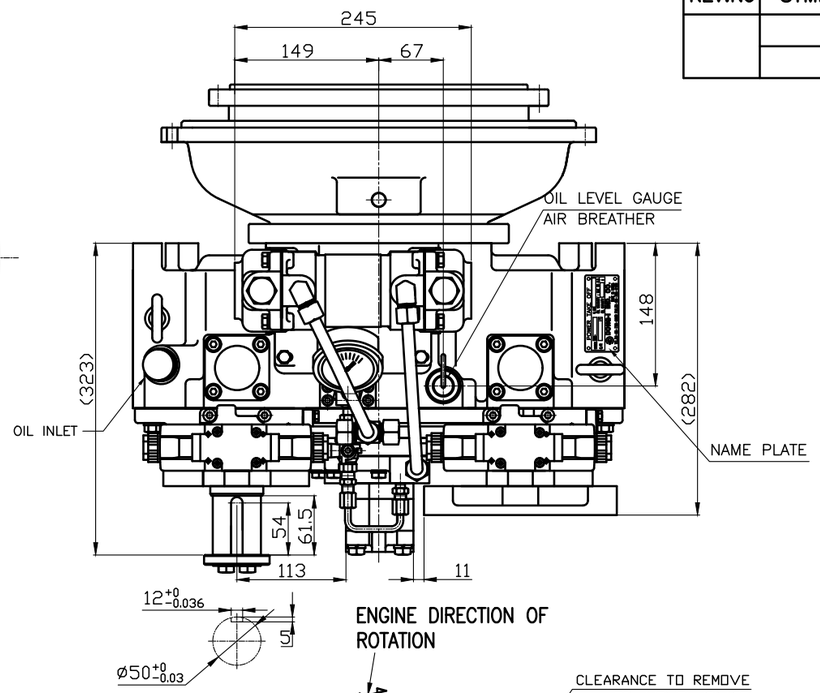

ENGINE DIRECTION OF ROTATION

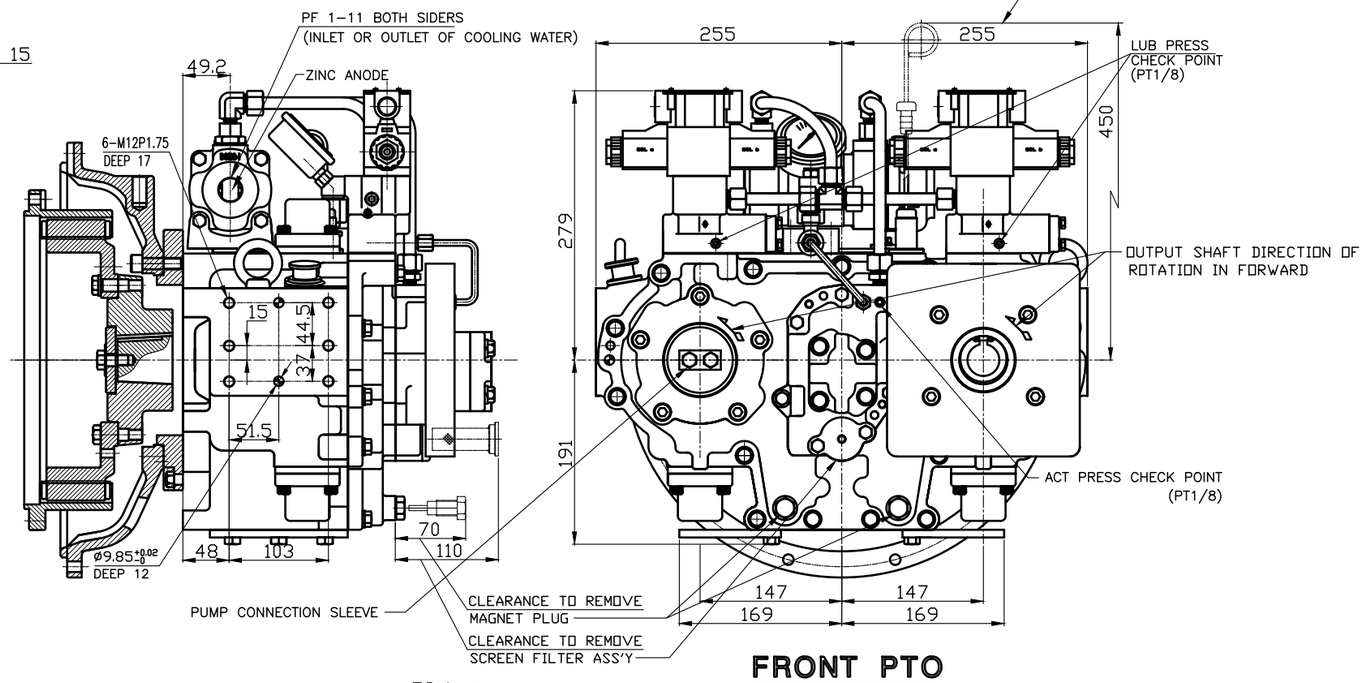

FRONT PTO



DPO-087 POWER TAKE OFF		
GEAR RATIO	1:1 / 0.85:1	
TOTAL WEIGHT	APPROX. 150Kg(DRY)	
OIL CAPACITY	APPROX. 3 L	
OIL VISCOSITY	SAE # 30	
OIL PRESSURE	20 ~ 26kg/cm²	CLUTCH OIL
OIL CHANGE INTERVAL	THE FIRST 100HOURS OF INITIAL OPERATION	
	AND EVERY 1000HOURS THEREAFTER	
OIL COOLER	WATER FLOW 20 ~ 40 L/m	
	TEMPERATURE OF COOLING WATER	MAX 32°C
OPERATING TORQUE OF SHIFTING LEVER		UNDER 30kg·cm



Scheme of Power train

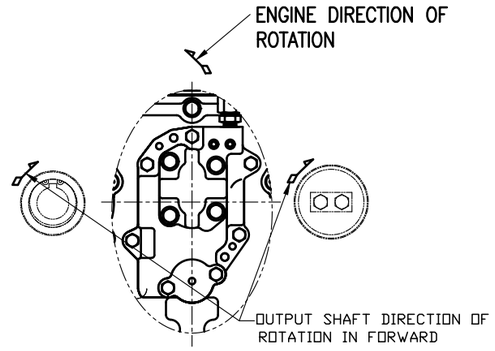

REAR PTO

REMARK
1. HOUSING: SAE#3
2. DRIVING RING: SAE 11.5"

제 품 HS Code		소 재 HS Code	
규 격 S I Z E		중 량 Weight	KG

공통공차 TOLERANCE ON			번호 NO.	품번 PART NO.	품명 PART NAME	계수 Q'TY	재질 MATERIAL	규격 SIZE	비고 REMARKS
분수 FRACTIONS ± ——	소수 DECIMALS ± ——	각도 ANGLES ± ——	재질 MATERIAL	주기 1 참조		형식 TYPE	DPO-087		원도번 ORIGINAL DWG. NO.
				작성 DATE 2015.01.12	척도 SCALE 1/1	품명 NAME	POWER TAKE OFF		
절삭가공			승인 APPROVED BY	검도 CHECKED BY	제도 DRAWN	설계 DESIGNED			
일반공차 구분	초급	중급	정급			도번 DWG. NO.	T087F(R)BGEH3115		
1 초과 4 이하	±0.3	±0.1	±0.05		성욱				
4 16	±0.5	±0.2	±0.07						
16 63	±0.7	±0.3	±0.1						
63 250	±1.2	±0.5	±0.2						
250 1000	±2.0	±0.8	±0.3						

D-I INDUSTRIAL

크기 SIZE A0 | 코드번호 CODE ID. NO.

SHEET 1 OF 1